


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		工程变更:去掉电压、电流刻字	WLM	08/13/08
△	10-0334	修改参数	ZXX	10/04/10

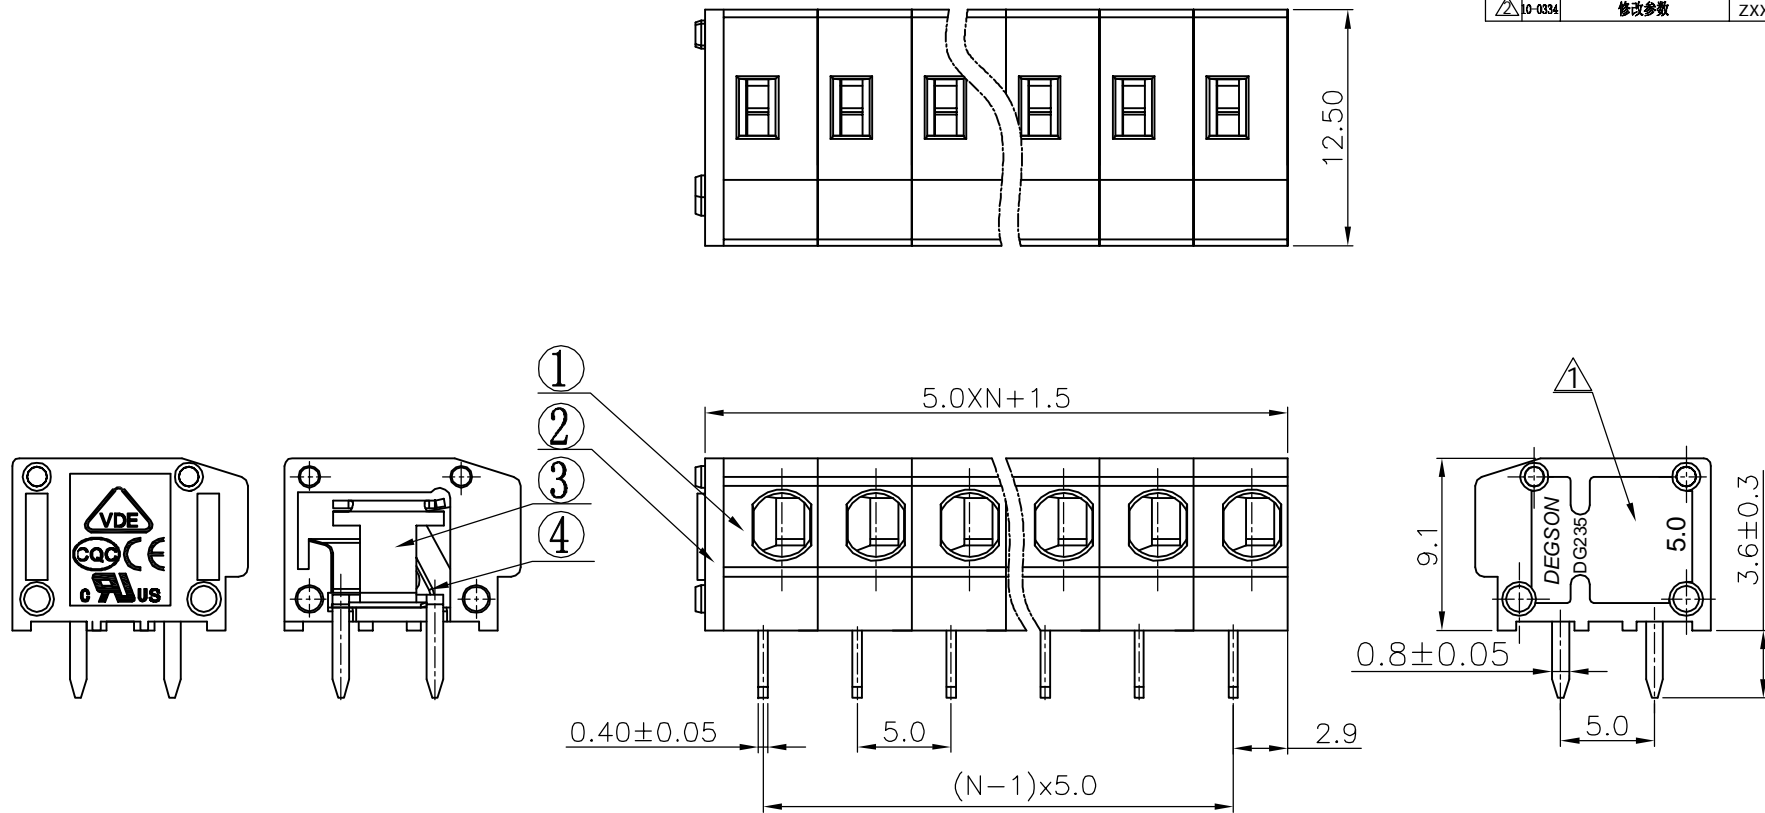

Notes:

- Pitch: 5.0mm, Poles: XXP
- Rated voltage/current: UL 300V/10A  
VDE 250V/15A △
- Operation temperatures: -40°C~+105°C
- Withstanding Voltage: AC1500V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 20~14AWG, 0.2~1.5mm<sup>2</sup> (str) △  
0.2~2.5mm<sup>2</sup> (sol)
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150	—	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	∇	
							0.05/10	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG235-5.0-Spring	X000000140 (H)	XX	Stainless Steel	
3	DG235-5.0-Pin header	3008B00010 (H)	XX	Phosphor Bronze	SnCe plated
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235W-5.0 Housing	3012A0Y01A (H)	XX	PA66	UL94V-0

DETAILED LISTS	MM (INCH)	DFTO Haoyh	DATE 10/08/05
		CHKD	DATE
		MFO	DATE
		APPVL	DATE
MM	±	MATERIAL :	
.0 ±	±	NAME	
.00 ±	±	DG235W-5.0-XXP-1Y-00A(H)	
.000 ±	±	DRAWING NO. DG235W-5.0-E01	
ANGLES ± 1°		FINISH :	
THIRD ANGLE PROJECTION		SCALE : 1:1	
		DO NOT SCALE DRAWING	
		SHEET 1 OF 1	