

## Typical Application



**QX-FF-130**

- Audio and Visual Equipment
  - CD player / DVD Player
  - Cassette adaptor
- Automotive Product
  - Air conditioning Damper Actuator

- Household Appliance
  - Electric shaver
  - Toothbrush
  - Door Lock Actuator


Precious metal-brush motor

Output : Approx 0.1W ~ 2.5W

Model	Voltage		Free load		At Max. Efficiency			Stall Torque (g.cm)	
	Operating range	Nominal Voltage (V)	Speed (r.p.m.)	Current (A)	Speed (r.p.m.)	Current (A)	Torque (g.cm)		Output (W)
QX-FF-130-2860	1.0~1.5	1.2	7400	0.21	5800	0.81	7.5	0.45	38
QX-FF-130-14230	2~8	3.0	3600	0.035	2900	0.12	6.0	0.18	36
QX-FF-130-11340	3~12	6.0	4800	0.030	3800	0.12	8.5	0.33	44
QX-FF-130-11340	3~12	9.0	7300	0.035	5900	0.15	12	0.73	67

## Dimensions

Unit: mm

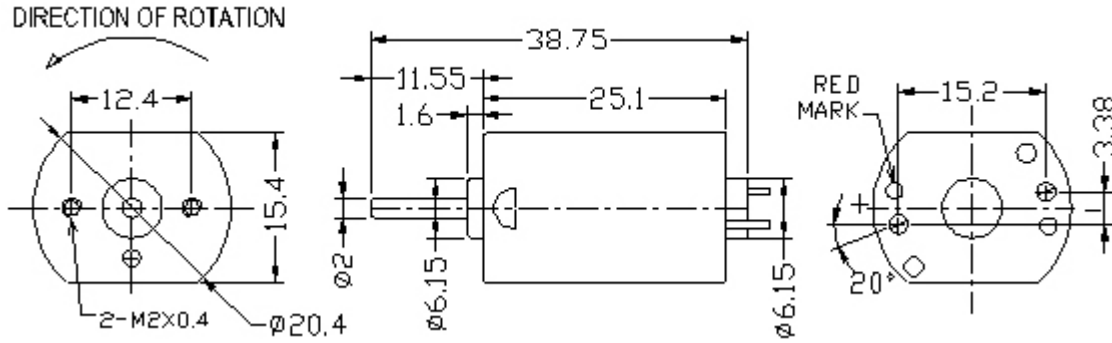

## Characteristic Curve

QX-FF-130-2860 1.2V

