

## Data sheet

Commercial Art.No.: 70.330.2435.1

Bottom BAS GUT GB 24 M25 A1

Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M25 on the right and left side, low version, 24-polig  $\,$ 



| Commercial Art.No. | 70.330.2435.1 |
|--------------------|---------------|
| EAN                | 4015573599536 |
| Order Unit         | 1             |

Certificates / Approvals

c**A**Us



### **Technical data**

#### General

| Housing material   | aluminum            |
|--|---------------------|
| Color  | Grey                |
| Surface  | With powder coating |
| Degree of protection (IP)                                  | Other               |
| UV resistant   | yes                 |
| Inflammability class of insulation material acc. with UL94 | Other               |
| Operating temperature range min.                           | -40 °C              |
| Operating temperature range max.                           | 120 °C              |

#### Model

| Construction           | 24                    |
|------------------------|-----------------------|
| Locking mechanism      | Double locking levers |
| Cable entry            | Two-sided             |
| Type of cable          | Thread                |
| With cable screw gland | No                    |
| Thread size M          | 25                    |
| Thread size PG         |                       |
| Hinged lid             | No                    |
| EMC-version            | No                    |
| Length                 | 144 mm                |
| Width                  | 57 mm                 |
| Height                 | 57 mm                 |

#### Classification

ECLASS 11



| ECLASS 8.1 | 27440202 |
|------------|----------|
| ETIM 7.0   | EC000437 |
| ETIM 6.0   | EC000437 |
| ETIM 5.0   | EC000437 |
| ETIM 4.0   | EC000437 |
| ETIM 3.0   | EC000437 |

#### Product compliance


| REACH-SVHC conformity status | Compliant |
|------------------------------|-----------|
|------------------------------|-----------|

# Fits with

| Commercial<br>Art.No.: | Article-type description:              | Description:   |
|------------------------|--|--|
| 70.100.2453.3          | Multipole adapter BAS BAS LL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, female insert, ground left          |
| 70.100.2453.4          | Multipole adapter BAS BAS KL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, female insert, ground left         |
| 70.105.2453.3          | Multipole adapter BAS BAS LR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, female insert, ground right         |
| 70.105.2453.4          | Multipole adapter BAS BAS KR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, female insert, ground right        |
| 70.110.2453.3          | Multipole adapter BAS SAS LL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, male insert, ground left            |
| 70.110.2453.4          | Multipole adapter BAS SAS KL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, male insert, ground left           |
| 70.115.2453.3          | Multipole adapter BAS SAS LR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, male insert, ground right           |
| 70.115.2453.4          | Multipole adapter BAS SAS KR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, male insert, ground right          |
| 70.101.2453.0          | Multipole adapter BAS BAF KL 24 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 24 pole + ground, short design, female insert, ground left  |
| 70.106.2453.0          | Multipole adapter BAS BAF KR 24 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 24 pole + ground, short design, female insert, ground right |
| 70.111.2453.0          | Multipole adapter BAS SAF KL 24 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 24 pole + ground, short design, male insert, ground left    |
| 70.116.2453.0          | Multipole adapter BAS SAF KR 24 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 24 pole + ground, short design, male insert, ground right   |
| 70.300.2440.0          | Female insert BAS BUS 24 2,5 50        | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts                      |
| 70.301.2440.0          | Female insert BAS BUS 24 2,5 50 AU     | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with gold-plated contacts                     |
| 70.302.2440.0          | Female insert BAS BUS OD 24 2,5 50     | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts                      |
| 70.310.2440.0          | Male insert BAS STS 24 2,5 50          | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts                       |
| 70.311.2440.0          | Male insert BAS STS 24 2,5 50 AU       | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with gold-plated contacts                      |
| 70.312.2440.0          | Male insert BAS STS OD 24 2,5 50       | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts                       |
| 70.500.2453.0          | Female insert BAS BUF 24 2,5 50        | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts                   |
| 70.510.2453.0          | Male insert BAS STF 24 2,5 50          | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts                       |



| 70.700.2458.0 | Female insert BAS BUC 24 50        | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts  |
|---------------|------------------------------------|--|
| 70.710.2458.0 | Male insert BAS STC 24 50          | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts   |
| 70.800.4656.0 | Female insert BAS BUCK 46 50 PC    | Female insert revos basic, 46-poles, polycarbonate insert, rated current: 16A, rated voltage: 500V, with gold-plated or silver-plated contacts |
| 70.810.4656.0 | Male insert BAS STCK 46 50         | Male insert revos basic, 46-poles, rated current: 16A, rated voltage: 500V, with gold-plated or silver-plated contacts                         |
| 70.400.1040.0 | Female insert BAS BUS 10 2,5 64    | Female insert revos basic, 10-poles, rated current: 16A, rated voltage:690V, with tin-plated contacts  |
| 70.410.1040.0 | Male insert BAS STS 10 2,5 64      | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 690V, with tin-plated contacts   |
| 70.400.1640.0 | Female insert BAS BUS 16 2,5 64    | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:690V, with tin-plated contacts  |
| 70.410.1640.0 | Male insert BAS STS 16 2,5 64      | Male insert revos basic, 16-poles, rated current: 16A, rated voltage: 690V, with tin-plated contacts   |
| 72.300.2453.0 | Female insert BAS BUS 24 2,5 69    | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:690V, with tin-plated contacts  |
| 72.310.2453.0 | Male insert BAS STS 24 2,5 69      | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 690V, with tin-plated contacts   |
| 72.700.2458.0 | Female insert BAS BUC 24 69        | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:690V, with tin-plated contacts  |
| 72.710.2458.0 | Male insert BAS STC 24 69          | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 690V, with tin-plated contacts   |
| 73.800.0853.0 | Female insert DD BUC 108 1,5 25    | revos DD 108 pole + ground, female insert, 250V/10A, crimp connection  |
| 73.810.0853.0 | Male insert DD STC 108 1,5 25      | revos DD 108 pole + ground, male insert 250V/10A, crimp connection   |
| 70.405.2453.0 | Female insert BAS BUP 24 2,5 50 AG | Female insert revos basic, 24-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts                                       |
| 70.415.2453.0 | Male insert BAS STP 24 2,5 50 AG   | Male insert revos basic, 24-poles, rated current: 16A, rated voltage: 500V, with silver-plated contacts  |
| 72.206.1253.0 | Female insert POW BUS 4/8 NL BB AG |  |
| 72.216.1253.0 | Male insert POW STS 4/8 NL BB AG   |  |

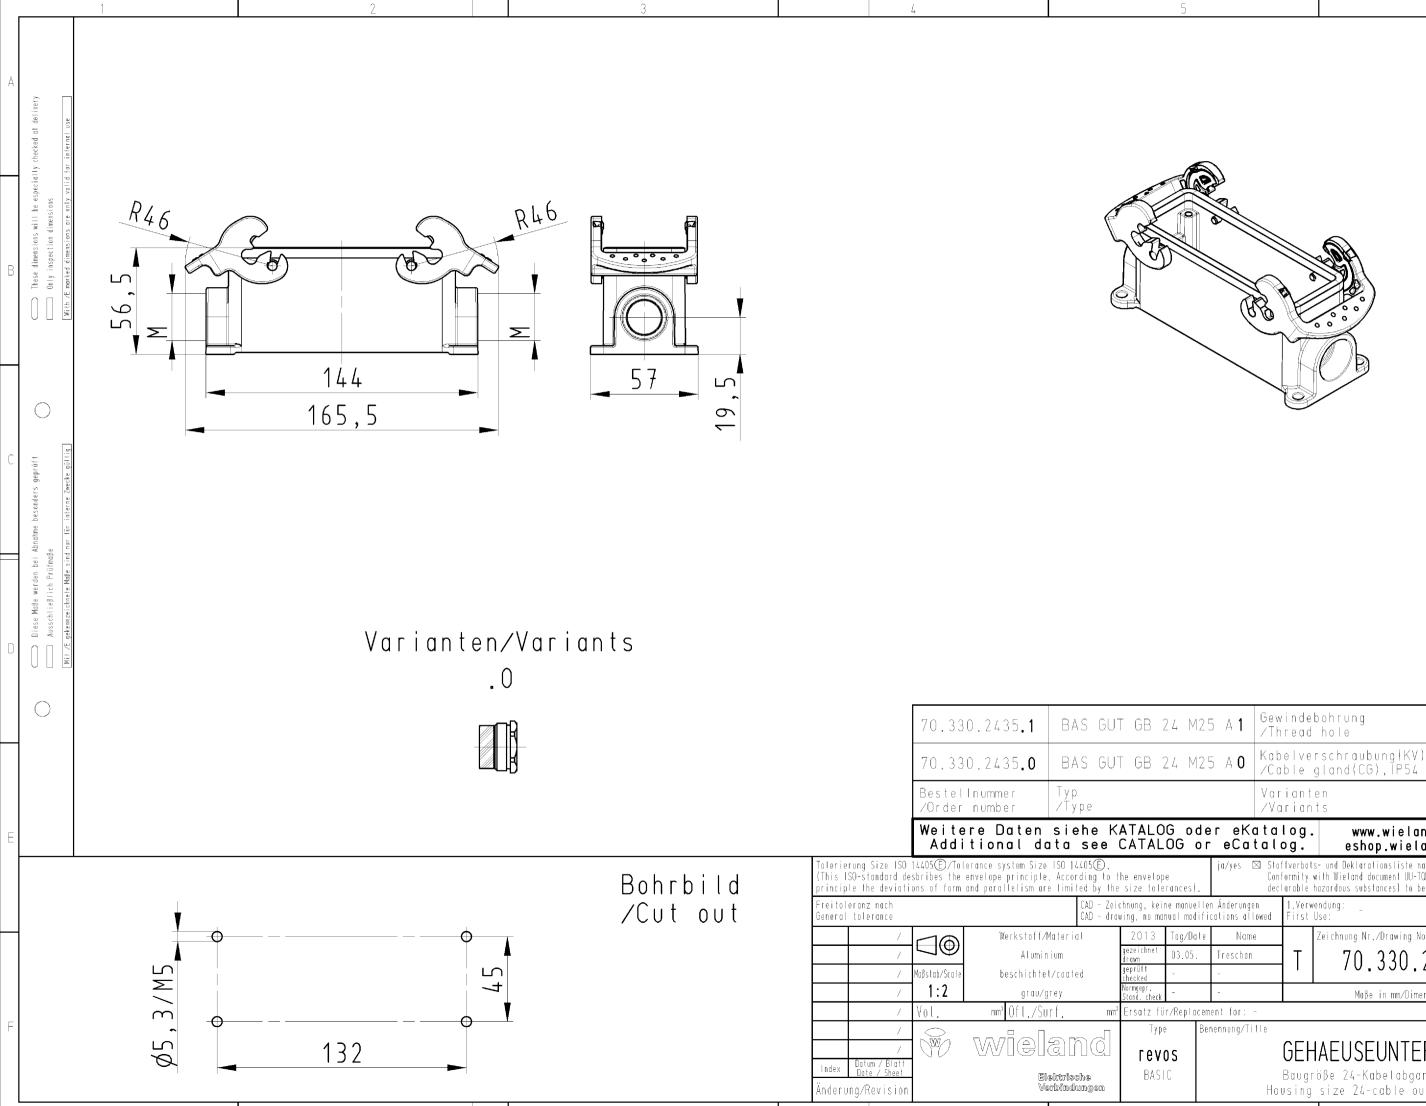

|   | A  |
|---|--|
| Ęď  | A<br>1<br>2<br>3<br>4<br>5<br>6<br>7<br>7<br>8<br>9<br>10<br>11<br>12<br>13<br>14<br>15<br>16<br>17<br>18<br>19<br>200<br>M1<br>M2<br>M3 |
| ilung<br>the<br>rohibite  | 2  |
| l Mitte<br>ell as<br>n is pr  | 3  |
| ng und<br>tet.<br>as v<br>rizatio   | 4  |
| rwertu<br>gestal<br>icumenl<br>s auto   | 5  |
| its, Ve<br>icklich<br>this do<br>expres:  | 6  |
| okumer<br>ausdru<br>n of j<br>thout e   | 7  |
| eses D<br>nicht<br>ilizatic<br>ers wil  | 8  |
| ung die<br>soweit<br>and ut<br>to oth   | Ģ  |
| ulfällig<br>oten<br>oution<br>nents   | 1 C  |
| Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung<br>seines Inhalts sind verboten, soweit nicht ausdrücklich gestaftet.<br>The reproduction, distribution and utilization of this document as well as the<br>communication of its conents to others without express autorization is prohibited. | 11   |
| sovie<br>Uts sir<br>luction,<br>ion of  | 12   |
| ergabe<br>es Inho<br>reprod<br>nunicat  | 13   |
| Weit<br>Seine<br>The<br>Comm  | 14   |
|   | 15   |
|   | 16   |
|   | 17   |
|   | 18   |
|   | 19   |
|   | 20   |
|   | М1   |
|   | М2   |
|   | М3   |
|   | 1  |

| 125  | 5 A <b>1</b> | Gewindebohrung<br>∕Thread hole  |              |                                 | Х                           |
|--|--------------|---|--------------|---------------------------------|-----------------------------|
| 125  | 5 A <b>0</b> | Kabelverschraubung(KV),1P54 montiert<br>/Cable gland(CG),1P54 assembled |              |                                 |                             |
|  |              |   | iant<br>rian |                                 | dar-<br>gestellt<br>∕drawed |
| der eKatalog. www.wieland-electric.com<br>or eCatalog. eshop.wieland-electric.com  |              |   |              |                                 |                             |
| ja/yes ⊠ Stoffverbots- und Deklarationsliste nach UU-TOM-05/03 ist einzuhalten.<br>Conformity with Wieland document UU-TOM-05/03 {list of prohibited /<br>declarable hazardous substances] to be declared! |              |   |              |                                 |                             |
| ellen Änderungen 1.Verwendung: – Blatt: 1 von 1<br>lifications allowed First Use: – Sheet: of 1  |              |   |              |                                 | 1                           |
| ite  | Name         | 9   |              | Zeichnung Nr./Drawing No.       | Index                       |
|  | Treschan     | T   |              | 70.330.2435.0 13K               |                             |
|  | -            |   |              | 70.000.2400.0 101               |                             |
|  | -            |   |              | Maβe in mm∕Dimensions are in mm |                             |
| icement for: -   |              |   |              |                                 |                             |
| Benennung/Title  |              |   |              |                                 |                             |
| GEHAEUSEUNTERTEIL  |              |   |              |                                 |                             |
| Baugröße 24-Kabelabgang 2x M25   |              |   |              |                                 |                             |
|  |              |   |              | size 24-cable outlet 2x M25     |                             |

QU-PEM-08/91b