


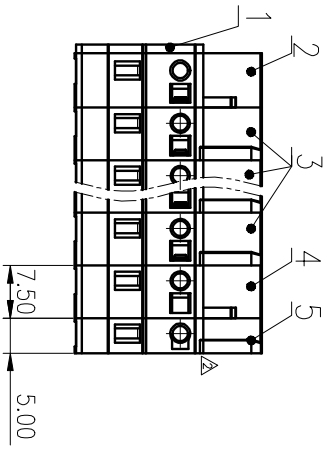

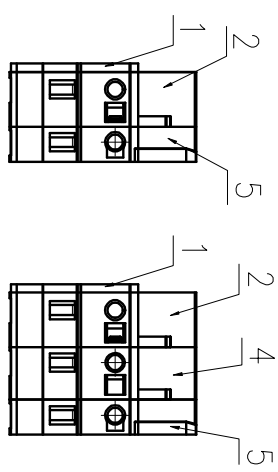


Pitch Range		In mm				Nominal Dimension				Range		In mm	
Over	6	Over	10	Over	30	Over	60	Over	100	Over	150		
TO	10	TO	24	TO	30	TO	60	TO	100	TO	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.50	±0.70	±1.00	±1.30			±2°		

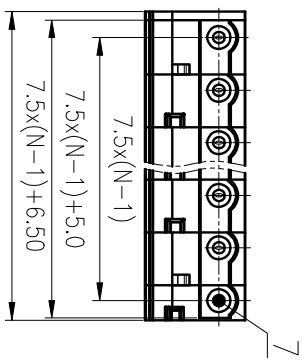

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing 1	PA66	UL94V-0
3	Middle housing 1	PA66	UL94V-0
4	Middle housing 2	PA66	UL94V-0
5	Side housing 2	PA66	UL94V-0
6	Spring	Copper alloy	Sn plated
7	Clamp	Copper alloy	Sn plated

UL 标准 / UL Standard:		B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15/300/15/300/10			
IEC 标准 / IEC Standard:				
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2	
额定冲击电压 (kV) / Rate Impulse Voltage (kV)	400/20	/	/	/
额定电涌电压 (kV) / Rate Impulse Voltage (kV)	4	/	/	/
线径范围 (硬线和软线) / Wire Range (rigid and flexible) (mm² / AWG)	0.2~2.5 / 22~14			
间距 / Pitch (mm) / 线数范围 / Poles	7.50 / N=02~12P			
剥线长度 / Stripping length (mm)	9~10			
使用温度范围 / Operating Temperature (°C)	-40~+105			
符合 RoHS 要求 / Conform to RoHS	Yes			
标准颜色编号 / Standard color number:	PANTONE 428C			
PANTONE / RAL	PANTONE 428C			

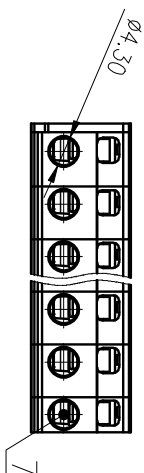

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: JEX 2014.04.29

SIZE: A4

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

8EDGK-7.5-XXP-11-1001A(H)

DRAWING NO. 8EDGK-7.5-1000-C02

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV: T0

SHEET: 1/1

REV	ECN	DESCRIPTION	DRT	DATE