

MATERIAL SPECIFICATIONS

RECOMMENDED

BASE METAL - CDA-210, GILDING, EXTRA SPRING TEMPER

PLATING - 0.005±0.0025 MM THICK TIN

MINIMUMS

ELECTRICAL CONDUCTIVITY - ≥20% IACS AT 20°C. USE OF A MATERIAL WITH CONDUCTIVITY < 20% IACS MUST BE APPROVED BY PACKARD ELECTRIC MATERIALS ENGINEERING.

TENSILE STRENGTH - 407 MPa

PLATING - FOR LOW ENERGY (<5V) AND NON-PASSENGER COMPARTMENT POWER CIRCUITS, 0.005±0.0025 MM THICK TIN. FOR MATERIALS CONTAINING 10% OR MORE ZINC, AN UNDERPLATE OF COPPER 0.005±0.0025 MM THICK IS REQUIRED.

MATING BLADE INFORMATION

SCALE 8:1

TYPE 104

SAME AS TYPE 101 EXCEPT AS SHOWN

TYPE 105

SAME AS TYPE 101 EXCEPT AS SHOWN



TYPE 103

SAME AS TYPE 101 EXCEPT AS SHOWN

TYPE 102

SAME AS TYPE 101 EXCEPT AS SHOWN

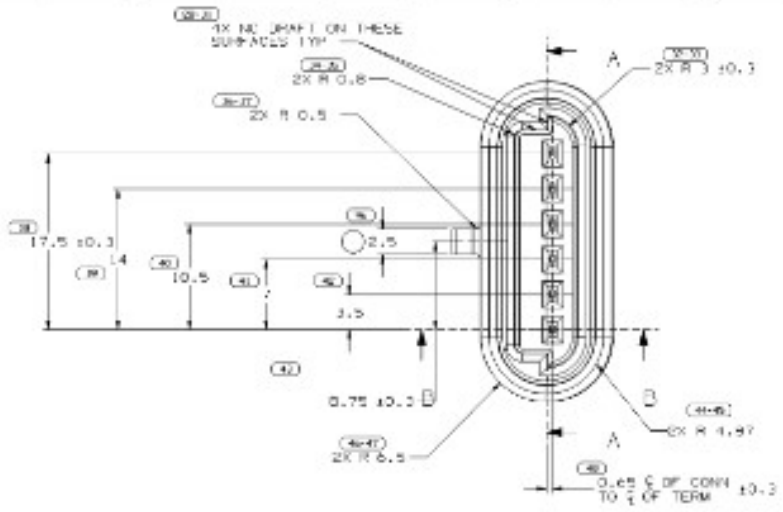

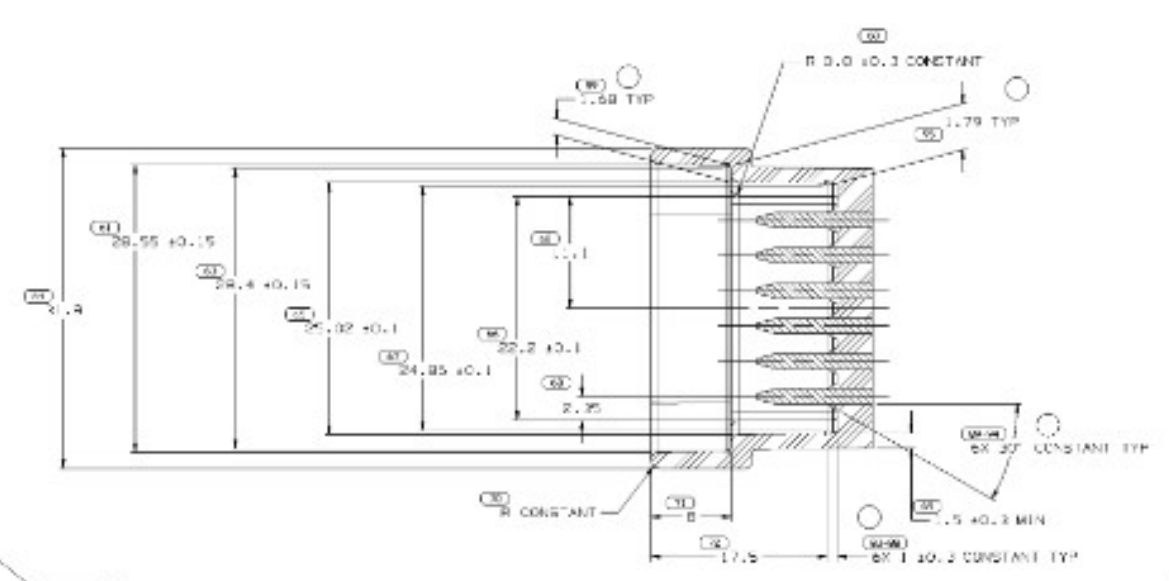

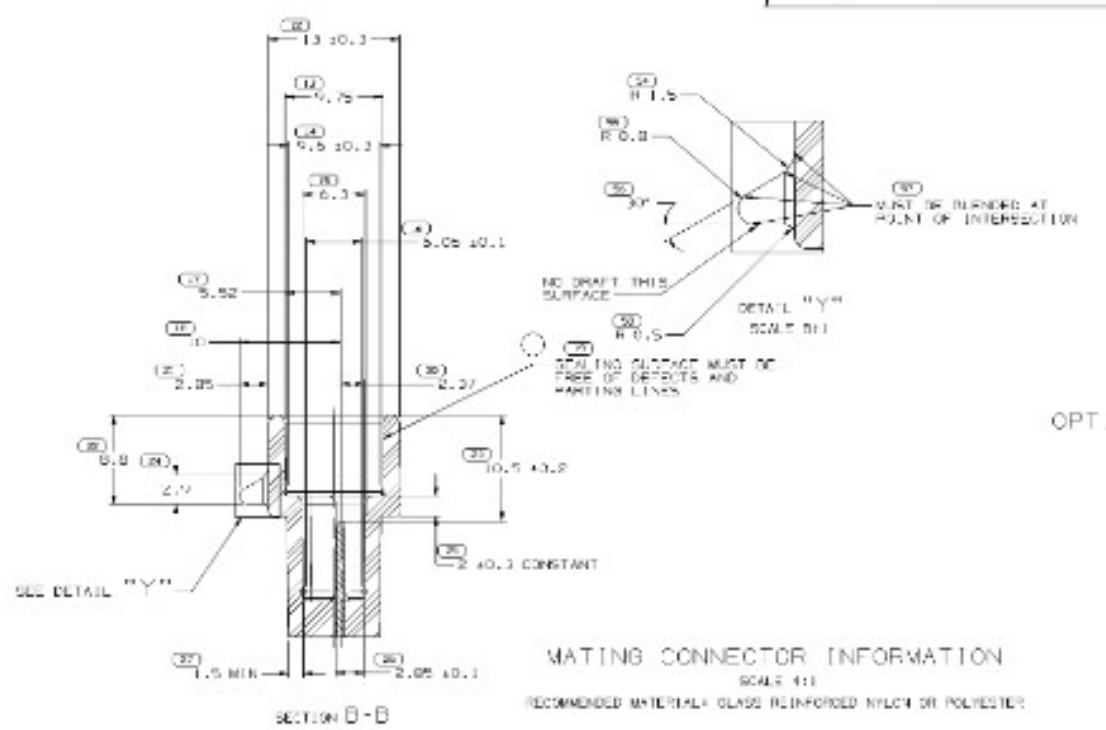

MATING CONNECTOR INFORMATION

SCALE 4:1

RECOMMENDED MATERIAL: GLASS REINFORCED NYLON OR POLYESTER



OPTIONAL CONSTRUCTION



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
   ALL RADII 0.4
   1° DRAFT ON ALL OUTSIDE SURFACES
2. WHEN USING THIS INFORMATION FOR A NEW DESIGN, REQUEST THE LATEST COPY OF THIS PRINT FROM DELPHI PACKARD ELECTRIC.

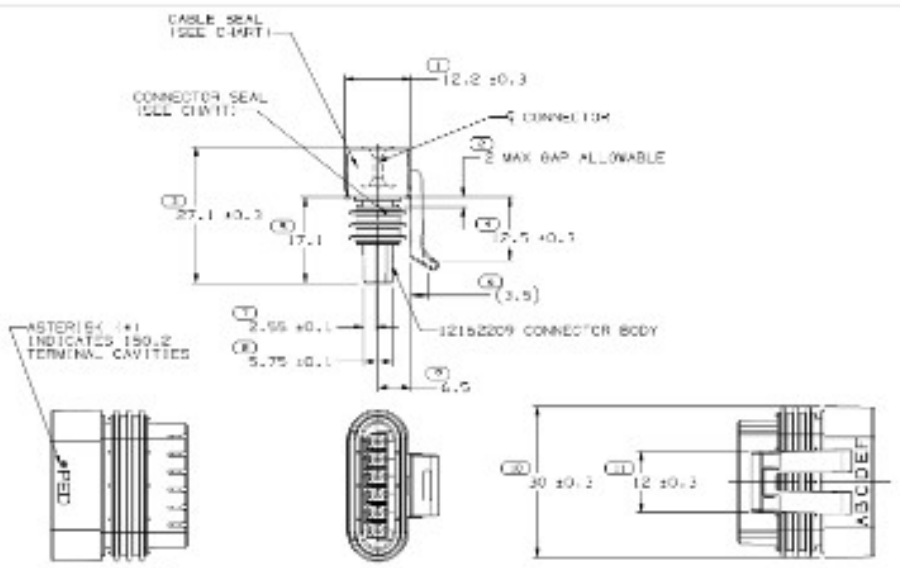

TYPE 101



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. CAVITIES TO ACCEPT 12124075 TERMINAL OR EQUIVALENT.
3. WHEN PARTS ARE SHIPPED THEY MUST BE PACKED IN PLASTIC BAGS OR SHIPPING CONTAINERS MUST BE LINED WHIT PLASTIC LINERS. BAGS MUST BE SEALED TO AVOID FOREING MATTER.
4. FOR LEAD LENGTH CALCULATIONS, DISTANCE FROM MATING END OF CONNECTOR TO FRONT OF CABLE CORE IS 10.15 7.05.
5. SEALING CODE 3.
6. FOR PART NUMBERS WITH ADHESIVE, USE PM002510 OR ADHESIVE APPROVED BY MATERIALS ENGINEERING TO GLUE CONNECTOR SEAL TO CONNECTOR.

PART NO WITH ADHESIVE	REV	N/P	STATUS	PART NO WITHOUT ADHESIVE	REV.	N/P	STATUS	TYPE	# OF AVAL CAVITIES	CAVITIES BLOCKED	CONNECTOR SEAL	CABLE SEAL PART NO. & COLOR
		-		15359101	01	AA		105	3	A,D,E	12059226	15359100 - DK. RED
		-		15354720	A1	-		103	5	C	12059226	15354719 - BLUE
		-		15324388	A1	-		104	4	C,D	12059226	15324387 - PURPLE
12166696	B1	-		12166030	A1	-		101	6	NONE	12166022	12124038 - LT. GRAY
		-		12162262	A1	-		102	2	A,B,C,F	12059226	12124543 - BLUE
		-		12162261	A1	-		101	6	NONE	12059226	12124038 - LT. GRAY
		-		12162260	A1	-		101	6	NONE	12059226	12084419 - TAN
		-		12162210	A1	-		101	6	NONE	12059226	12052929 - GREEN

SYMBOL DEFINITION			MISSING NUMBERS
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ⬭ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON AN INDIVIDUAL COMPONENT DRAWING.	TOTAL NO. OF SYMBOLS ON DRAWING	75	73.
	LAST NO. USED	96	

DATE	STD	REV	N/P	CHG	ZONE	REVISION HISTORY	AUTH	DR	APPR	APPR 2
07DEC98	8	01				ALL PARTS - REDRAWN TO TO NO REV UPDATE REQD	980009	GMO	GMO	SJV
07DEC98	8	02	-	-		15324388 - RELEASED TO REV A	980008	GMO	GMO	SJV
06JAN00	8	01	-	-		15359101 - RELEASED	000005	MAO	MAO	EGD
10DEC01	8	04	-	-		ALL PARTS - ADDED DIMS 3 PLCS; RELOCATED SEALING SURFACE LEADER; REV'SED DIMS 2 PLCS	249687	MAO	MAO	EGD

DRAWING NUMBER 12162264

SIZE	SCALE	FRAME NO	SHEET NO	REV
A1x2	2:1	1 OF 2	1 OF 1	04

DELPHI

DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH

PART DRAWING

THIRD ANGLE PROJECTION

DO NOT SCALE

USE MATH DATA

UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS ARE IN MILLIMETERS

	NAME	DATE
APPR	T. BEILSTEIN	02FEB94
APPR	T.E. BEILSTEIN	02FEB94
APPR	E.J. BURGER	17FEB94

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10848650

DRAWING TITLE: TAXI CONN 7 W/P 150.2 N/#

DRAWING NUMBER: 12162264

SIZE	SCALE	FRAME NO	SHEET NO	DFT	REV
A1x2	2:1	1 OF 2	1 OF 1	11	04